

ecoGEO

Ground source heat pumps



ecoGEO

Inverter ground source, the most efficient technology

The ecoGEO range is the Ecoforest range of geothermal heat pumps. These heat pumps, both domestic and high power, are compatible with any of the type of ground source collection system, even with hybrid aérothermal-geothermal collection systems and fully aérothermal collection systems. Likewise, they are also capable of offering all the services required in a HVAC system in an integrated way: DHW, Heating, Pool, Passive Cooling (or Free Cooling) and Active Cooling.




All ecoGEO heat pumps make use of Inverter technology, which allows them to modulate their power in order to adapt to the thermal demands of the installation with the highest efficiency. This translates into a very considerable reduction in electrical consumption and great savings. Thanks to the technology and control strategies developed by Ecoforest, the installation of ecoGEO heat pumps also becomes much simpler, more compact and cheaper than those of other heat pumps on the market, since it allows to dispense with certain components that would be necessary in traditional heat pump installations.

ecoGEO Basic & Compact


Domestic range



Power ranges

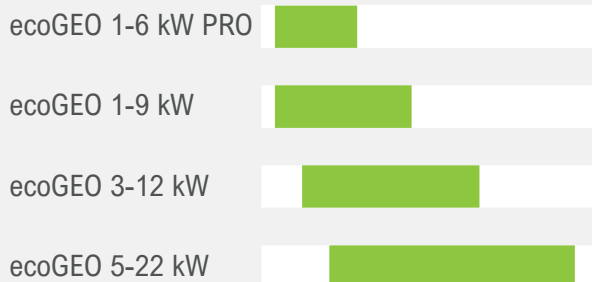

Cascade



Services



DHW



Heating



Cooling



Pool

Models

ecoGEO B1/C1

DHW
Heating
Pool

ecoGEO B2/C2


DHW
Heating
Pool
Free Cooling

ecoGEO B3/C3

DHW
Heating
Pool
Active Cooling

ecoGEO B4/C4

DHW
Heating
Pool
Free Cooling
Active Cooling

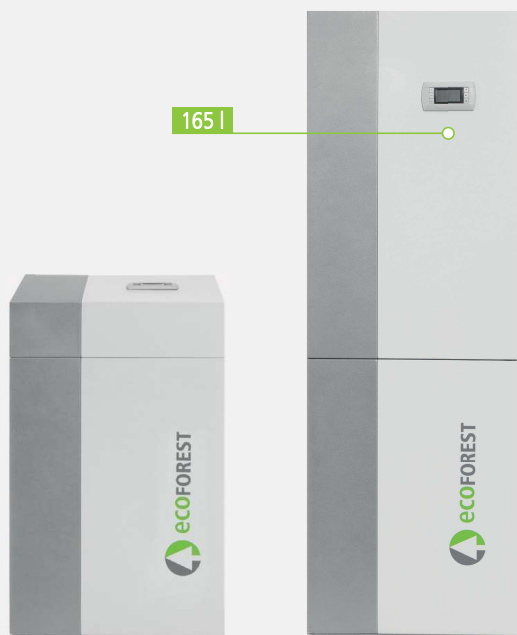

Inverter technology

Power ranges: 1-6 kW / 1-9 kW / 3-12 kW / 5-22 kW

Domestic hot water production

Heating and pool production

Integrated active cooling production

Integrated passive (free) cooling production

Internet connection through the ecoSMART Easynet

Photovoltaic hybridization through ecoSMART e-manager & e-system energy managers

HTR technology for DHW production up to 70°C and simultaneous production of several services

Natural refrigerant used in ecoGEO PRO models allowing DHW production temperature up to 75°C

Integrated cascade management up to 3 units

Single-phase (230V) or three-phase (400V) power supply

Collection system



Ground



Open loop



Air



Hybrid



ecoGEO B/C 1-6 PRO

R290


- Modulating thermal power control within a wide range (15-100%) and modulating flow rate control of both brine and production circuits (20-100%).
- Natural refrigerant R290 : GWP 3.
- Inverter technology.
- Compact design including brine and production circulation pumps, brine and production expansion vessels (8l and 12l respectively), brine and production safety valves and DHW three-way valve.
- Integrated management of up to 2 different emission temperatures, 1 buffer tank (heating and cooling), 1 DHW tank, 1 pool and hourly control of DHW recirculation.
- Integrated management of aerothermal collection modulating units, in case of air source configurations.
- Integrated management of external On/Off or modulating auxiliary systems, such as electrical heaters, On/Off boilers or modulating boilers.
- Integrated free cooling in models 2 and 4.
- Integrated active cooling in models 3 and 4.
- Single-phase version available.
- Compatible with ecoSMART e-manager and ecoSMART e-system.
- Integrated energy meters to measure the electrical consumption, the heating/cooling thermal power, the COP and the monthly and annual SPF.

SPECIFICATIONS ecoGEO B/C 1-6 PRO		UNITS	B1/C1	B2/C2	B3/C3	B4/C4	
APPLICATION	Place of installation	-	Indoors				
	Type of brine system ¹	-	Ground source / Air source				
	DHW, Heating and Pool	-	✓	✓	✓	✓	
	High Temperature Recovery (HTR) system option	-	-	-	-	-	
	Integrated Active cooling	-	-	-	✓	✓	
PERFORMANCE	Integrated Passive cooling	-	-	✓	-	✓	
	Modulation range of the compressor	%	15 to 100				
	Heating power output ^{2,10} , B0W35	kW	1,0 to 6,0				
	COP ^{2,10} , B0W35	-	4,3				
	Active cooling power output ^{2,10} , B35W7	kW	-	1,0 to 6,0			
	EER ^{2,10} , B35W7	-	-	4,5			
	Max. DHW temperature without / with support ⁵	°C	75 / 80				
	Noise power emission level ^{6,10}	db	33 to 44				
	Energy label / rjs / SCOP W35 average climate control	-	A+++ / 192% / 5,0				
	Energy label / rjs / SCOP W55 average climate control	-	A++ / 142% / 3,74				
OPERATION LIMITS	Distribution / Set heating outlet temperature range	°C	10 to 75 / 20 to 75				
	Distribution / Set cooling outlet temperature range	°C	4 to 35 / 7 to 25				
	Brine inlet temperature range in heating applications	°C	-25 to 35				
	Brine inlet temperature range in cooling applications	°C	10 to 75				
	Minimum / Maximum refrigerant circuit pressure	bar	0,7 / 31,5				
	Production / Pre-load circuit pressure	bar	0,5 to 3,0 / 1,5				
	Brine / Pre-load circuit pressure	bar	0,5 to 3,0 / 0,7				
WORKING FLUIDS	Volume / Max. DHW storage tank pressure (ecoGEO C)	l / bar	165 / 8				
	R290 Refrigerant load	kg	0,15				
	Compressor oil type / load	kg	PZ46M / 0,3				
CONTROL ELECTRICAL DATA	1/N/PE 230 V / 50-60 Hz ⁸	-	✓				
	Maximum recommended external protection ⁹	-	C10A				
	Transformer primary circuit fuse	A	0,5				
	Transformer secondary circuit fuse	A	2,5				
ELECTRICAL DATA: SINGLE-PHASE	1/N/PE 230 V / 50-60 Hz ⁸	-	✓				
	Maximum recommended external protection ⁹	-	C25A				
	Maximum consumption ² , B0W35	kW / A	1,7 / 7,6				
	Maximum consumption ² , B0W55	kW / A	0,8 / 3,2				
	Minimum / Maximum starting current ⁷	A	1,3 / 5,7				
DIMENSIONS/WEIGHT	Correction of cosine Ø	-	0,96/1				
	Height x width x depth	mm	ecoGEO B: 1060x550x602 · ecoGEO C: 1804x600x720				
	Empty weight (without assembly)	kg	B 125 · C 186	B 133 · C 194	B 125 · C 186	B 133 · C 194	

- Air source by replacing the ground source circuit by one or more ecoGEO AU air units. Consult the ecoGEO AU aerothermal units manual for more detailed information.
- In compliance with EN 14511, this includes the consumption of the circulation pumps and the compressor driver.
- Considering brine and production flow rates in compliance with EN 14511.
- Considering a heat slope from 20°C to 50°C in absence of consumption.
- Considering support provided by the emergency electrical heater.
- In compliance with EN 12102, this includes the acoustic insulation kit of the compressor.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more detailed information.
- Certification in process.


Dimensions and hydraulic connections

Operational chart

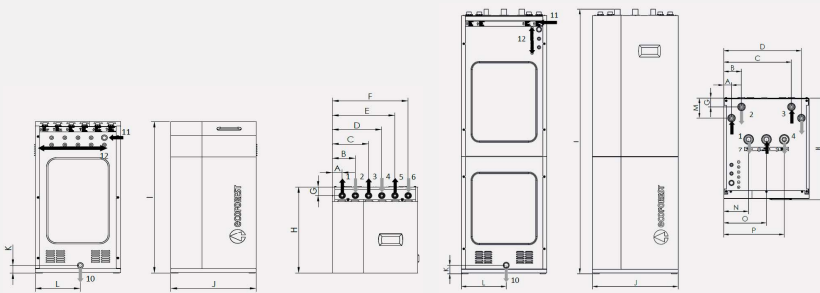


MODEL	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
ecoGEO Basic	63	148	233	318	403	488	60	602	1058	550	53	290	-	-	-	-
ecoGEO Compact	55	125	475	545	-	-	62	720	1851	600	58	315	140	175	300	425













1. Heating/Cooling Outlet - 1" M
2. Heating/Cooling Inlet - 1" M
3. Brine Outlet - 1" M
4. Brine Inlet - 1" M
5. DHW System Outlet - 1" M
6. DHW System Inlet - 1" M
7. DCW Inlet - 1" F
8. DHW Outlet - 1" F
9. DHW Recirculation Inlet - 3/4" F
10. Drain - 16 mm

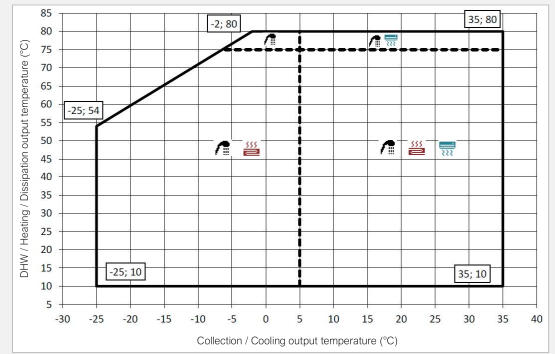

Installation management

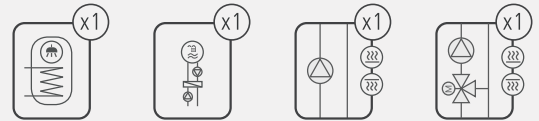

Performance curves

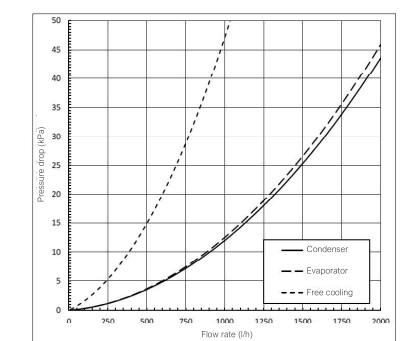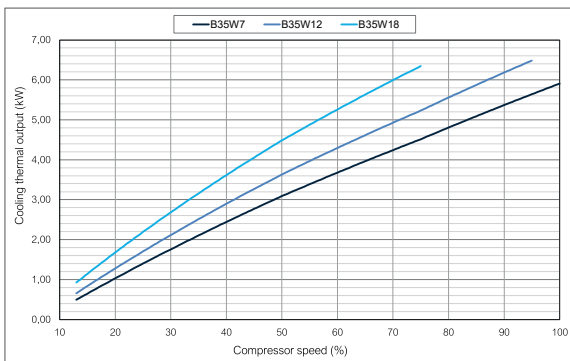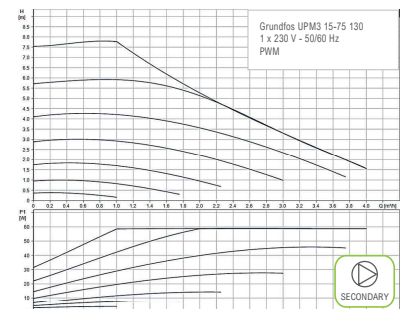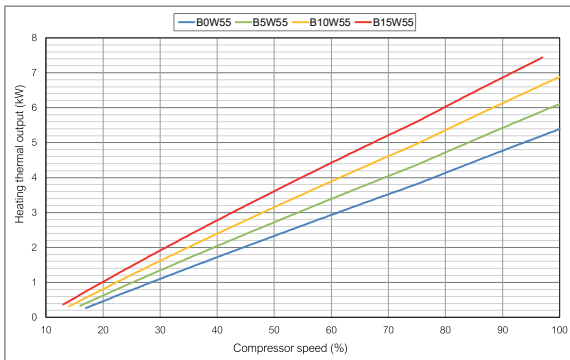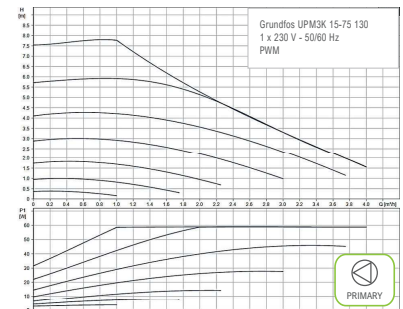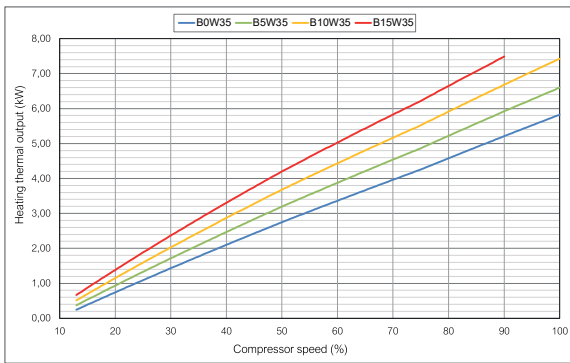

ECOFOREST GEOTERMIA, S.L.

Parque Empresarial Porto do Molle · Rúa das Pontes 25
36350 Nigrán - Pontevedra (Spain)

+34 986 262 184

www.ecoforest.com



Ecoforest shall not be held responsible for any error contained in this these technical data sheets and reserves the right to make any modifications it deems necessary for both technical and commercial reasons at any time and without prior notification. The availability of any equipment described in this document shall always be confirmed by Ecoforest. The inclusion of the equipment in this catalogue does not imply an immediate availability.

