

# Specifications

## Wind-Free™ 1-Way Cassette

- 2-Step Cooling: Fast Cooling & Wind-Free™ Cooling.
- Blade angle between 37° and 87°, blade width 100 mm.
- Built-in humidity sensor.
- Height of only 135 mm.
- Built-in condensation drain pump (750 mmH<sub>2</sub>O).



Indoor Unit		AJ026TNDKG/EU	AJ035TNDKG/EU
<b>Capacity</b>			
Cooling	kW	2.6	3.5
Heating @ +7 °C	kW	2.9	3.8
<b>Performance</b>			
Airflow Rate	m <sup>3</sup> /min	6.2/5.2/4.2	7.6/6.6/5.6
Sound Power	dB(A)	50	55
Sound Pressure	H/M/L	32/29/26	37/33/30
<b>Electrical Data</b>			
Power Source	Φ, #, V, Hz	10, 2, 220-240 V, 50 Hz	10, 2, 220-240 V, 50 Hz
<b>Power Consumption</b>			
Cooling	W	45	50
Heating	W	45	50
<b>Current Input</b>			
Cooling	A	0.23	0.25
Heating	A	0.23	0.25
<b>Dimensions</b>			
Net Dimensions (W x H x D)	mm	970 x 135 x 410	970 x 135 x 410
Net Weight	kg	10.0	10.0
<b>Refrigerant</b>			
Piping Connections	Liquid Pipe	φ, inch	1/4
	Gas Pipe	φ, inch	3/8
Piping Connections	Drain Pipe	φ, mm	VP20 (OD 26, ID 20)
<b>Others</b>			
Panel	Model Code	PCINWFMAN	PCINWFMAN
	Net Dimensions (W x H x D)	mm	1,198 x 35 x 500
	Net Weight	kg	4.3
<b>Accessories</b>			
	Drain Pump	Included	Included
	Max. Lifting Height/Displacement	mm / litres/h	750/24


### Accessories



Wireless Remote Controller	Advanced Wired Controller	Simple Type Controller	Touch Controller	Wired Remote Controller	Wi-Fi Kit	Panel (Required)
AR-EH05E	MWR-WG00JN/ MWR-WG00KN	MWR-SH00N	MWR-SHT1N	MWR-WE13N	MIM-H04EN	PCINWFMAN

# Dimensional drawings

## Wind-Free™ 1-Way Cassette

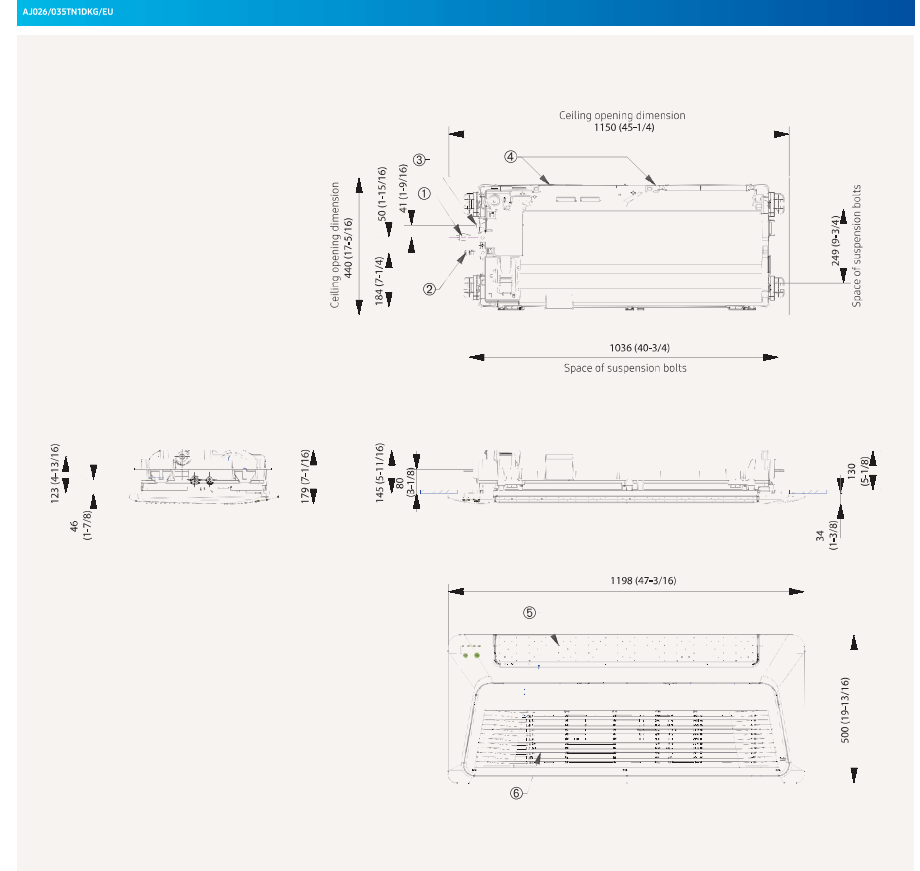

NO	Name	Description
1	Gas pipe connection	φ2.70 (1/2)
2	Liquid pipe connection	φ6.35 (1/4)
3	Drain hose connection	VP20 (OD 26, ID 20)
4	Power supply/communication wiring conduits	
5	Air outlet louvre	
6	Air inlet grille	